



SIMPLY RELIABLE

- ✓ SALT OR MINERAL SALT COMPATIBLE
- ✓ MULTI-FUNCTION MENU SYSTEM
- ✓ EASY TO USE TOUCH PAD
- ✓ EFFICIENT CHLORINE PRODUCTION
- ✓ ULTRA LONG LIFE SELF-CLEANING CELL
- ✓ FULLY AUTOMATED
- ✓ SIMPLE SET UP AND OPERATION
- ✓ QUICK CONNECT CELL
- ✓ HORIZONTAL OR VERTICAL INSTALL OPTION WITH CELL HOUSING
- ✓ SMART TEMPERATURE SENSORS (POWER SUPPLY & WATER)
- ✓ EASY INSTALLATION TO NEW OR EXISTING POOLS
- ✓ SMART INTERFACE CONNECTION TO:
 - pH PURESWIM CONTROLLER
 - HEAT PUMP SIGNAL TO TURN PUMP ON

pureswim.com.au



4 YEARS*
FULL WARRANTY
OR 10,000 OPERATING HOURS

*Domestic and Commercial installations, whichever comes first





PURESWIM®
THE HEALTHY WAY TO SWIM

FEATURES

- LOW SALT OPERATION: 3500PPM (0.35%) WITH BUILT IN REGULATOR FOR HIGH SALT**
- FRESHWATER/ULTRA LOW SALT: 1500PPM (0.15%) OPTION AVAILABLE IN PCH25LS & PCH35LS MODELS**
- BACKLIT LCD INTERFACE DISPLAYING DETAILED OPERATOR INSTRUCTIONS CLEARLY**
- SMART SELF-CLEANING CELL ELECTRODE**
- PREMIUM GRADE QUICK CONNECT TITANIUM CELL FOR INCREASED LIFESPAN**
- BACKWASH, SUPER CHLORINATE AND WINTER MODE FUNCTIONS**
- SINGLE OR DUAL TIMER CYCLES**
- BUILT IN SALT/TDS TEST, WATER FLOW AND TEMPERATURE PROTECTION**
- AUTOMATIC BATTERY BACK-UP TIMER**
- MODERN, SLIM LOOKING POWER PACK**
- SUITABLE FOR ALL POOL SURFACES: CONCRETE, FIBREGLASS, VINYL & TILED**




SMART INTERFACE TO
CAS PH-LOGIX
*SOLD SEPARATELY

MULTI-DIRECTION CELL &
HOUSING INCLUDED

PURESWIM®

SIZING CHART

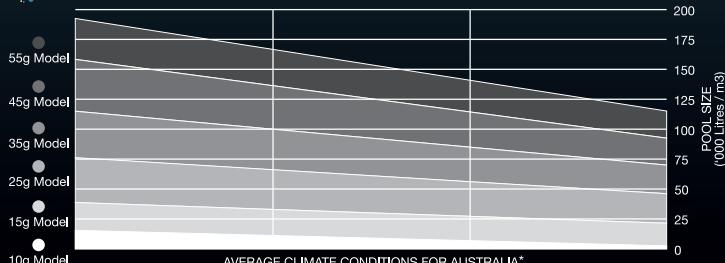

* Sizing chart provided as a guide only. Consult your local CAS dealer for the correct systems, size and specification to suit your needs.

CHLORINE PRODUCTION

Model	Per Hour			Per 8 Hours		
	Chlorine Output	Cal.Hypo Equivalent (65%)	Sod.Hypo. Equivalent (12.5%)	Chlorine Output	Cal.Hypo Equivalent (65%)	Sod.Hypo. Equivalent (12.5%)
PCH15	15g	23g	120ml	120g	184g	960ml
PCH15LS	15g	23g	120ml	120g	184g	960ml
PCH25	25g	38g	200ml	200g	304g	1600ml
PCH25LS	25g	38g	200ml	200g	304g	1600ml
PCH35	35g	54g	280ml	280g	432g	2240ml
PCH35LS	35g	54g	280ml	280g	432g	2240ml
PCH45	45g	69g	360ml	360g	552g	2880ml
PCH55HD	55g	85g	440ml	440g	680g	3520ml

PCH55HD is only available in HD (15,000hr) material. PCH15-45 available in HD material, add HD after the above MODEL code.

SPECIFICATION TABLE

Model	Input Volts (Vac)	Input Amps** (Aac)	Input Power (Watts)	Output Volts (Vdc)	Output Amps** (Adc)	Frequency (Hz)	Weight (kg)	Dimensions (cm)
PCH15	220-240	0.86	204.7	7.57	15.0	50/60	9.70	46Lx37Wx21H
PCH15LS	220-240	0.86	204.7	7.57	15.0	50/60	9.85	46Lx37Wx21H
PCH25	220-240	1.25	293.0	7.38	25.0	50/60	12.30	46Lx37Wx21H
PCH25LS	220-240	1.25	293.0	7.38	25.0	50/60	12.45	46Lx37Wx21H
PCH35	220-240	1.06	244.9	8.02	17.5	50/60	12.80	46Lx37Wx21H
PCH35LS	220-240	1.06	244.9	8.02	17.5	50/60	12.95	46Lx37Wx21H
PCH45	220-240	1.30	292.2	7.98	22.5	50/60	12.90	46Lx37Wx21H
PCH55HD	220-240	1.78	413.0	8.73	27.5	50/60	15.35	46Lx37Wx21H

** - all readings taken at 230Vac and in optimum salt water ppm, with a water temperature of 26°C.



POOLPLUS AQUATICS PTY LTD

VICTORIA:
Factory 2 /16 Monterey Rd
Dandenong South VIC 3175
Ph: (03) 9792 0088

QUEENSLAND:
2 Hayter Street
Currumbin QLD 4223
Ph: (07) 5534 3136



Your Local Agent

pureswim.com.au